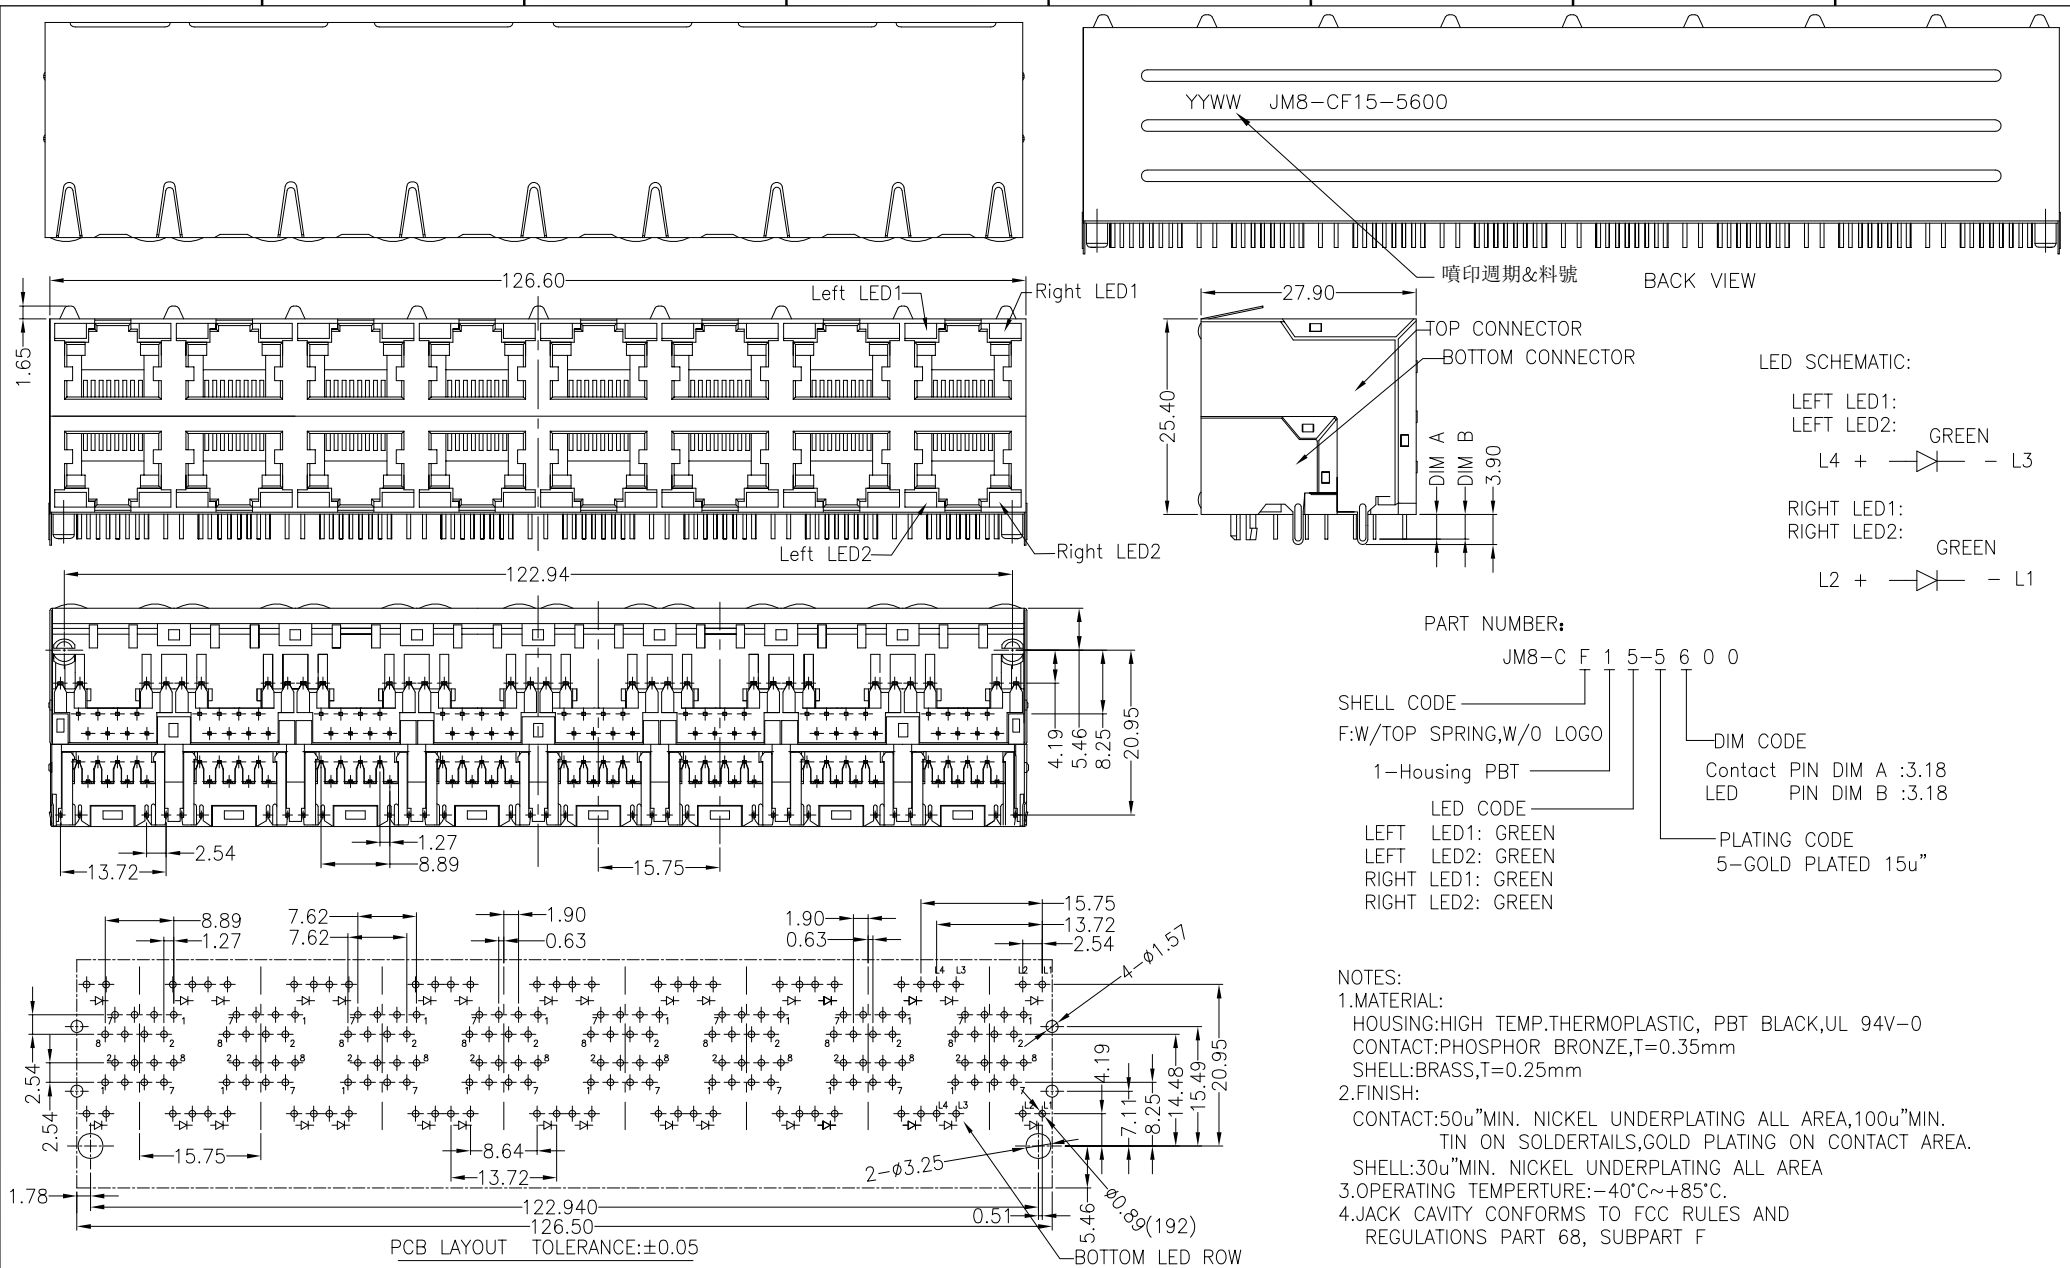

PCB LAYOUT TOLERANCE:±0.05

LED SCHEMATIC:

LEFT LED1:
LEFT LED2:
GREEN
L4 + — L3

RIGHT LED1:
RIGHT LED2:
GREEN
L2 + — L1

PART NUMBER:

JM8-C F 1 5-5 6 0 0

SHELL CODE
F:W/TOP SPRING,W/O LOGO

1-Housing PBT

LED CODE
LEFT LED1: GREEN
LEFT LED2: GREEN
RIGHT LED1: GREEN
RIGHT LED2: GREEN

DIM CODE
Contact PIN DIM A :3.18
LED PIN DIM B :3.18

PLATING CODE
5-GOLD PLATED 15u"

NOTES:
1.MATERIAL:
HOUSING:HIGH TEMP.THERMOPLASTIC, PBT BLACK,UL 94V-0
CONTACT:PHOSPHOR BRONZE,T=0.35mm
SHELL:BRASS,T=0.25mm
2.FINISH:
CONTACT:50u"MIN. NICKEL UNDERPLATING ALL AREA,100u"MIN. TIN ON SOLDERTAILS,GOLD PLATING ON CONTACT AREA.
SHELL:30u"MIN. NICKEL UNDERPLATING ALL AREA
3.OPERATING TEMPERTURE:-40°C~+85°C.
4.JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F

REV.	ECN. NO.	DRAWN	DATE	EC.content
A	NEW	YongDe	06/25/2015	

ECONN Technology
ECONN CORPORATION
HSF Compliant

Ⓧ:QUALITY CONTROL ITEM
APPROVED
CHECKED
DRAWN

GENERAL TOLERANCE
.X± 0.38 X.°± 2°
.XX± 0.25 .X°± 1°
.XXX± 0.13

PART NO.: JM8-CF15-5600
TITLE: RJ45 2x8 JACK
W/ LED & SHELL T/H

UNIT: mm | SCALE: 1:1 | SHEET: 1/1 | REV.: A

SIZE: A4

說明: △ ◇:備註 Ⓝ: 版本變更 ■ : 尺寸[illegible]號 ▼ 重點尺寸
: CPK尺寸

DOCUMENT NO. : ZER0013/A.3