


RECOMMENED PCB LAYOUT
COMPONENT SIDE
TOLERANCE ±0.05

LEFT LED:
GREEN
L4 + — L3
RIGHT LED:
YELLOW
L2 + — L1

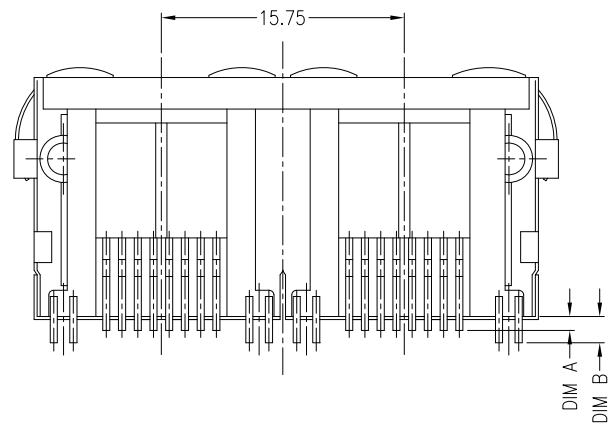

PART NUMBER:

JS2-C B 2 1-5 1 0 H
H: LED高溫燈

SHELL CODE
B:W/ ALL SPRING,
W/O LOGO

2-housing NY6T
LED CODE

LEFT LED: YELLOW
RIGHT LED: GREEN

DIM CODE

CODE	Contact PIN DIM A	LED PIN DIM B
1	0.90	1.70

PLATING CODE
5-GOLD PLATED 15u"

NOTES:

- MATERIAL:
HOUSING:HIGH TEMP.THERMOPLASTIC,BLACK,NY6T(PA6T)UL 94V-0
CONTACT:PHOSPHOR BRONZE,T=0.35mm
SHELL:BRASS,T=0.20mm
- FINISH:
CONTACT:50u"MIN NICKEL UNDERPLATING ALL AREA,
100u"MIN. TIN ON SOLDER TAILS,
GOLD PLATING ON CONTACT AREA.
SHELL:30u"MIN. NICKEL UNDERPLATING ALL AREA
- OPERATING TEMPERATURE:-40°C~+85°C.
- JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F

REV.	ECN. NO.	DRAWN	DATE	EC.content
A	NEW	XingJian	11/12/2015	



⊗: QUALITY CONTROL ITEM		GENERAL TOLERANCE		PART NO.: JS2-CB21-510H			
APPROVED		.X± 0.38	X.'± 2'	TITLE:RJ45 CONNECTOR JS 1X2PORT W/LED,8P,8C,SHIELDED,SMT TYPE			
CHECKED		.XX± 0.25	.X'± 1'				
DRAWN		.XXX± 0.13		UNIT: mm	SCALE: 1:1	SHEET: 1/1	REV.: A

說明: △:備註 ◇:版本變更 ①:尺寸序號 ■:重點尺寸 ▼:CPK尺寸 DOCUMENT NO. : ZER0013/A.3

SIZE: A4