

F

E

D

C

B

A

F



E

D

C

B



A

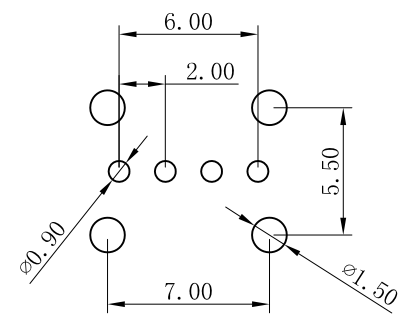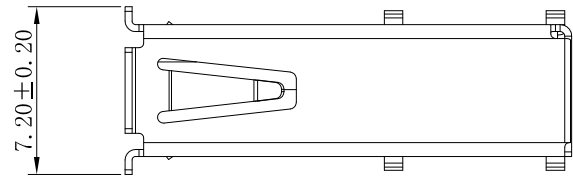

备注:

1. 材质: 端子: C2680
外壳: SPCC
塑胶: PBT环保
2. 电镀规格: 端子: 镀镍底50u", 接触区域镀金GFu", 焊接区域镀锡100u"Min.
3. 盐雾试验要求: 测试12H
4. 胶心耐高温200° ~ 220°
5. 电气性能:
 - A. 接触阻抗: Contact Resistance.
30 milliohms MAX
 - B. 耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
 - C. 绝缘阻抗: Insulation Resistance:
1000MEGA ohms MIN

◇ 编码原则:

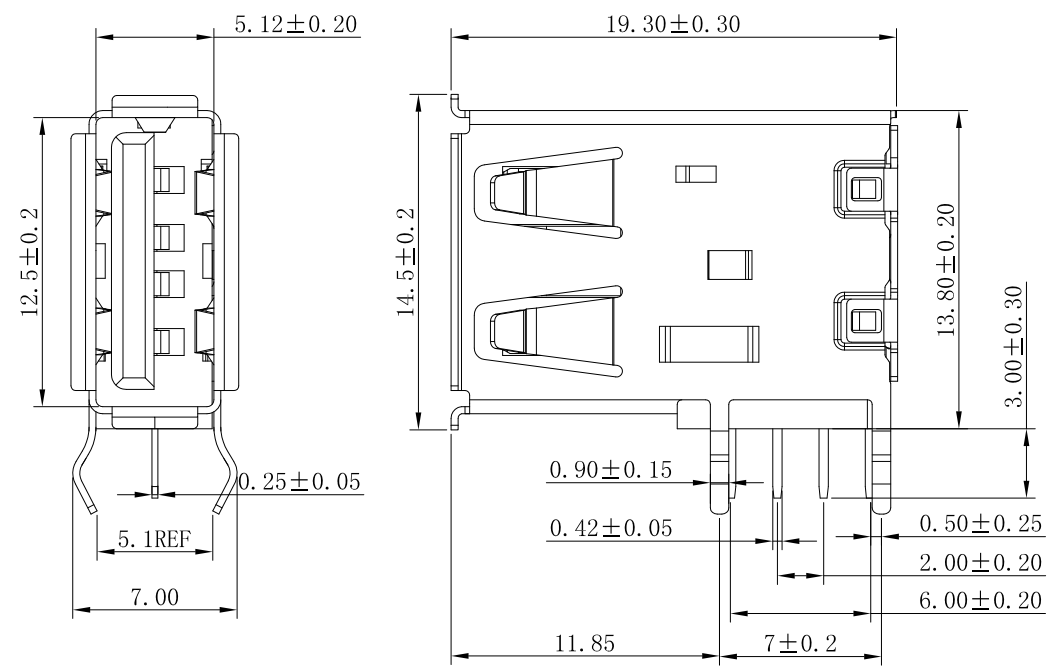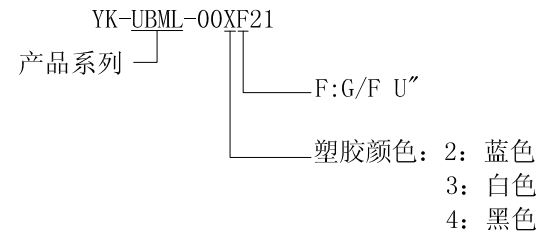

REV.	ECN. NO.	DRAWN	DATE	EC. content
A2	EN1608001	LLDONG	08/08/2016	修改外壳脚宽度尺寸
A3	EN1608004	LLDONG	08/23/2016	新增编码原则, 增加白色、蓝色规格



⊗: QUALITY CONTROL ITEM	GENERAL TOLERANCE .X ± 0.38 X' ± 2° .XX ± 0.25 .X' ± 1° .XXX ± 0.13	PART NO.: YK-UBML-00XF21
APPROVED		TITLE: USB AF 侧插
CHECKED		SCALE: 1:1 SHEET: 1/1 REV.: A3
DRAWN	UNIT: mm	

SIZE: A4