



REV.	ECN. NO.	DRAWN	DATE	EC.content
A	NEW	WuQiangYuan	05/08/17	-

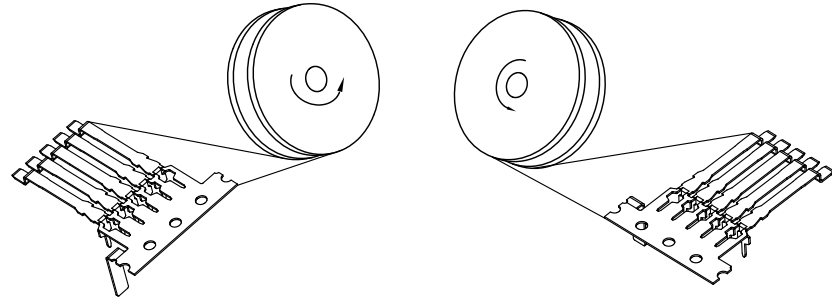

⊗: QUALITY CONTROL ITEM	APPROVED	GENERAL TOLERANCE .X± 0.10 X.± 3' .XX± 0.05 .X'± 3' .XXX± 0.03	PART NO.: 20-0431-0A TITLE: USB3.0-15 5PIN TERMINAL				
	CHECKED						
	DRAWN						
RoHS	30u" 15u" 10u"	NO PLATING	20-0431-6A 20-0431-5A 20-0431-3A	RoHS	5u" 1u"	MATTE TIN	20-0431-2A 20-0431-1A
GP TYPE				GP TYPE	CONTACT AREA GOLD THICKNESS	SOLDER AREA	PART NUMBER

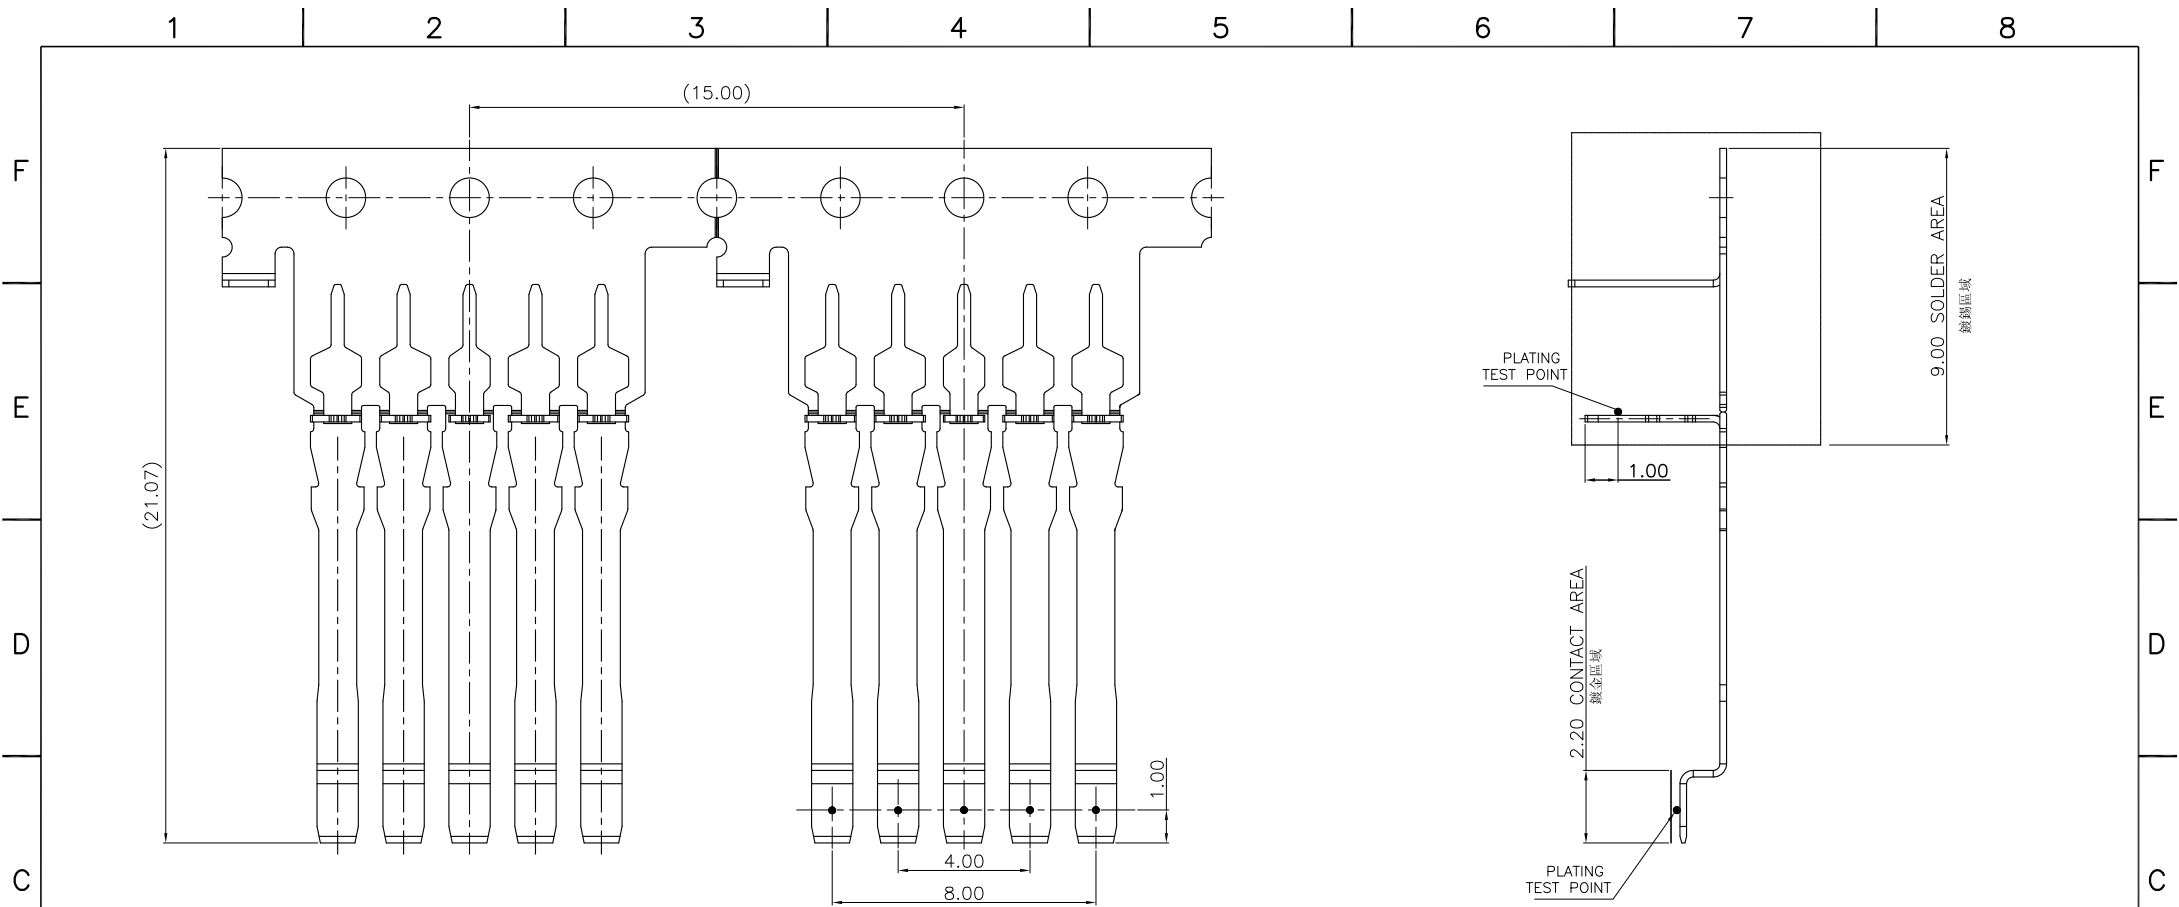

⑳ 衝壓收料方向 ㉑ 電鍍出料方向

- 說明**
- 材質: 銅 C2680-H, T=0.20±0.01
 - 毛邊: 0.05 最大, 接觸區和焊錫區無毛邊
 - 料帶弧形: 5mm MAX/1000mm.
 - 扭曲: 45° MAX/1000mm.
 - : 重點尺寸
 - ⊛: FAI尺寸
 - ▼: CPK尺寸
 - 電鍍規格
 - 8-1 全區鍍鍍底 50-100u";
 - 8-2 接觸面鍍金(規格對照表);
 - 8-3 焊腳鍍鍍 80-120u";
 - 模具 NO.: C0299-A0

REV.	ECN. NO.	DRAWN	DATE	EC.content
A	NEW	WuQiangYuan	05/08/17	-



⊛: QUALITY CONTROL ITEM		GENERAL TOLERANCE .X± 0.10 X.'± 3' .XX± 0.05 .X'± 3' .XXX± 0.03		PART NO.: 20-0431-0A	
APPROVED		UNIT: mm		SCALE: 1:1	SHEET: 2/2
CHECKED		DRAWN: 吳強遠 17.05.08			REV.: A

F
F
D
C
B
A
DIE ON: YK261
SIZE: A4