



- NOTES:
1. 材质: C7025 TM04, 厚度: 0.15mm;
 2. 不可有任何压伤, 毛边最大0.02mm, 折弯处不可有电镀无法覆盖之折弯痕, 折弯处镀料后宽度尺寸须在标注尺寸内, 未标注之R角为R0.10mm 最大, 折弯外R为R0.24mm, 端子电镀须进行油性封孔, 焊接区电镀须通过WETTING BALANCE测试;
 3. 电镀前和电镀后零件均须符合RoHS相关规定;
 4. 电镀规格: 5-1 基层电镀40-60u" 镍底 5-2 A区域: 接触区, 镀金(见料号可选) 5-3 B区域: 焊接区, 雾锡60-120 μ"
 5. 此部品, 禁止使用含有《环境管理物质控制标准》所限制的物质作为材料;
 6. "■" SHOWS QIP INSPECTION POINT.
 7. "⊙" SHOWS FAI MEASUREMENT POINT.
 8. "◇" SHOWS CPK MEASUREMENT POINT.

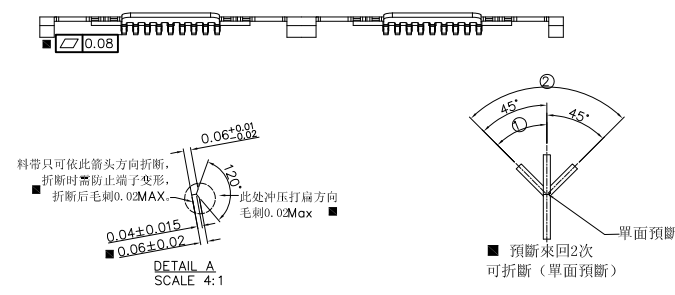

REV.	ECN. NO.	DRAWN	DATE	EC.content
A	NEW	WuQiangYuan	11/12/15	-

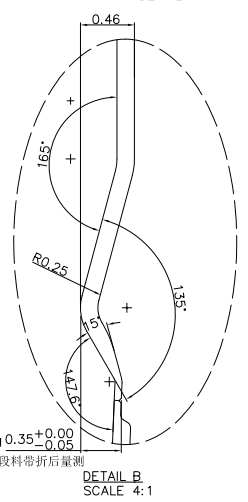

⊗: QUALITY CONTROL ITEM	GENERAL TOLERANCE	PART NO.: 3341-XXXX8-041
	.X±0.10 X:±3' .XX±0.05 .X:±3' .XXX±0.03	
APPROVED		TITLE: WMF 二排脚式-9PIN TERMINAL
CHECKED		
DRAWN	吳強遠 15.11.12	UNIT: mm
		SCALE: 1:1
		SHEET: 1/1
		REV.: A