
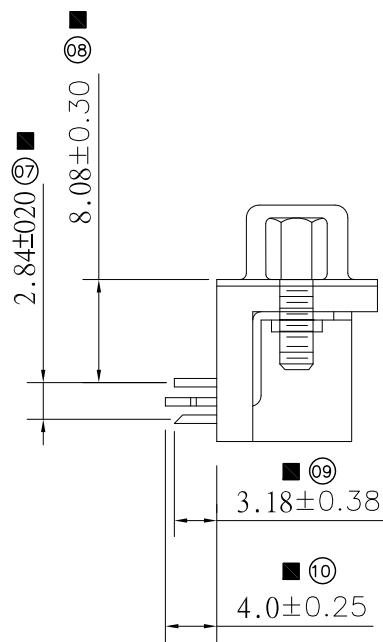
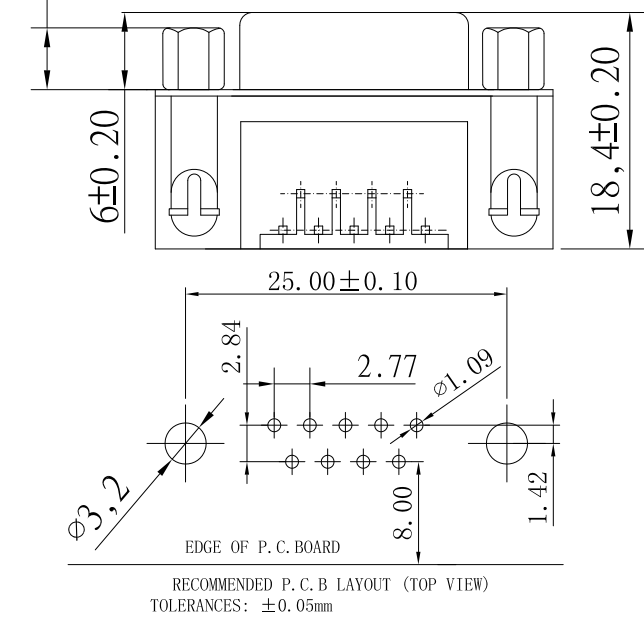


F  
E  
D  
C  
B  
A

1 2 3 4 5 6 7 8

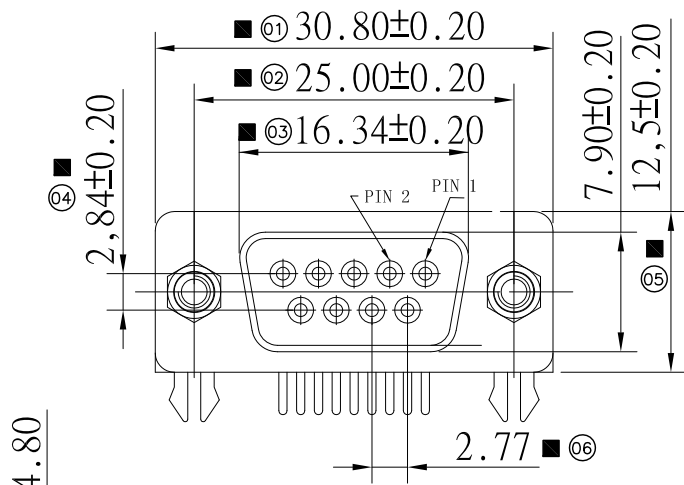

PARTS DIMENSION TABLE

parts no.	DIM. a	DIM. b	inner thread
C	4.8	11.8	4#40 ✓
E	5.8	12.0	4#40
G	4.8	11.8	M3
H	6.0	13.2	M2.6
I	5.8	11.8	M3
X	4.8	11.8	M2.6
Z	5.8	12.0	M2.6
7	6.0	12.0	4#40
9	6.1	12.0	4#40

MATERIAL:  
 INSULATOR:PBT+30% GLASS FIBER(UL94V-0).  
 CONTACT: BRASS  
 CONTACTPLATED:GOLD OVER NICKEL OR TIN  
 SHELL:STEEL,NICKEL OR TIN  
 SPECIFICATION:  
 CURRENT RATE:5 AMPS  
 INSULATOR RESISTANCE:1000M MIN.AT 500V DC  
 DIELECTRIC STRENGTH:1000V PER  
 OPERATION TEMPERATURE:-55C TO+105C  
 IMPEDANCE:16M FOR 25MHz

A

REV.	ECN. NO.	DRAWN	DATE	EC.content
A	NEW	LLDONG	09/06/2016	-



⊗: QUALITY CONTROL ITEM		GENERAL TOLERANCE		PART NO.: YK-DR9F-8.08		
APPROVED		.X± 0.38	X.'± 2'	TITLE: 9PIN 8.08 叉锁		
CHECKED		.XX± 0.25	.X'± 1'			
DRAWN		.XXX± 0.13		UNIT: mm	SCALE: 1:1	SHEET: 1/1
				REV.: A		

1 2 3

說明: △ :備註 ◇ :版本變更 ⑧ :尺寸序號 ■ :重點尺寸 ▼ :CPK尺寸

DOCUMENT NO. : ZER0013/A.3

SIZE: A4