


NOTES:

- 1.MATERIAL  
HOUSING: HIGH TEMPERATURE LCP, Black, UL94 V-0.
- 2.CONTACTS: PHOSPHOR BRONZE  
PLATING :15μ" GOLD ON MATING AREA,  
GOLD FLASH PLATING ON  
SOLDER TAILS, 50μ" NICKEL  
UNDERPLATING OVERALL.
3. MECHANICAL REQUIREMENT:  
3.1 DURABILITY:100 CYCLES MIN.  
3.2 INSERTION AND EXTRACTION FORCE:40N MAX. & 11.5N MAX.
4. ENVIRONMENTAL:  
4.1 CONTACT RESISTANCE:20 MILLIOHMS MAX INITIAL.  
4.2 DIELECTRIC WITHSTANDING VOLTAGE: 300V AC/MIN.  
4.3 CURRENT RATING: 0.5 Amps Max.  
4.4 OPERATION: -40°C TO +95°C  
4.5 STORAGE: -55°C TO +105°C  
4.6 REFLOW SOLDERING TEMPERATURE: 255~265° MAXIMUM  
FOR 5~10 SECONDS.  
4.9 ROHS COMPLIANT
- 5.PACKAGING: TAPE AND REEL




| REV. | ECN. NO. | DRAWN | DATE       | EC.content |
|------|----------|-------|------------|------------|
| A.0  | NEW      | Candy | 03/29/2022 |            |
|      |          |       |            |            |
|      |          |       |            |            |

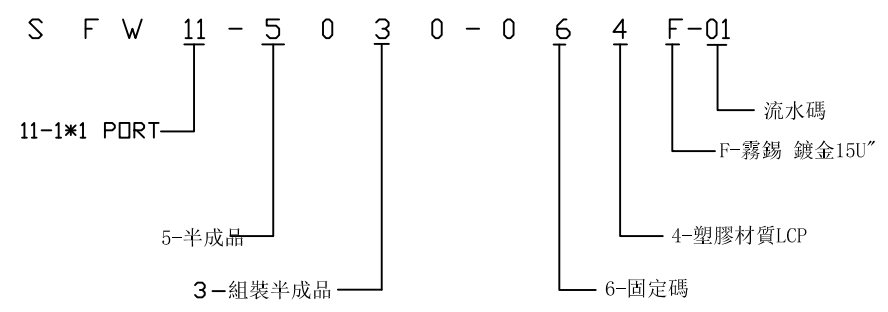

|                         |   |                                  |
|-------------------------|---|----------------------------------|
| ⊗: QUALITY CONTROL ITEM | GENERAL TOLERANCE<br>.X± 0.38 X:± 2'<br>.XX± 0.25 .X:± 1'<br>.XXX± 0.13 | PART NO.: SFW11-5030-064F-01     |
| APPROVED                |   | TITLE:<br>SFP&SFP+ 1X1 CONNECTOR |
| CHECKED                 |   |                                  |
| DRAWN                   | UNIT: mm  | SCALE: 1:1 SHEET: 1/3 REV.: A.0  |

1 2 3 4 5 6 7 8

F  
E  
D  
C  
B  
A

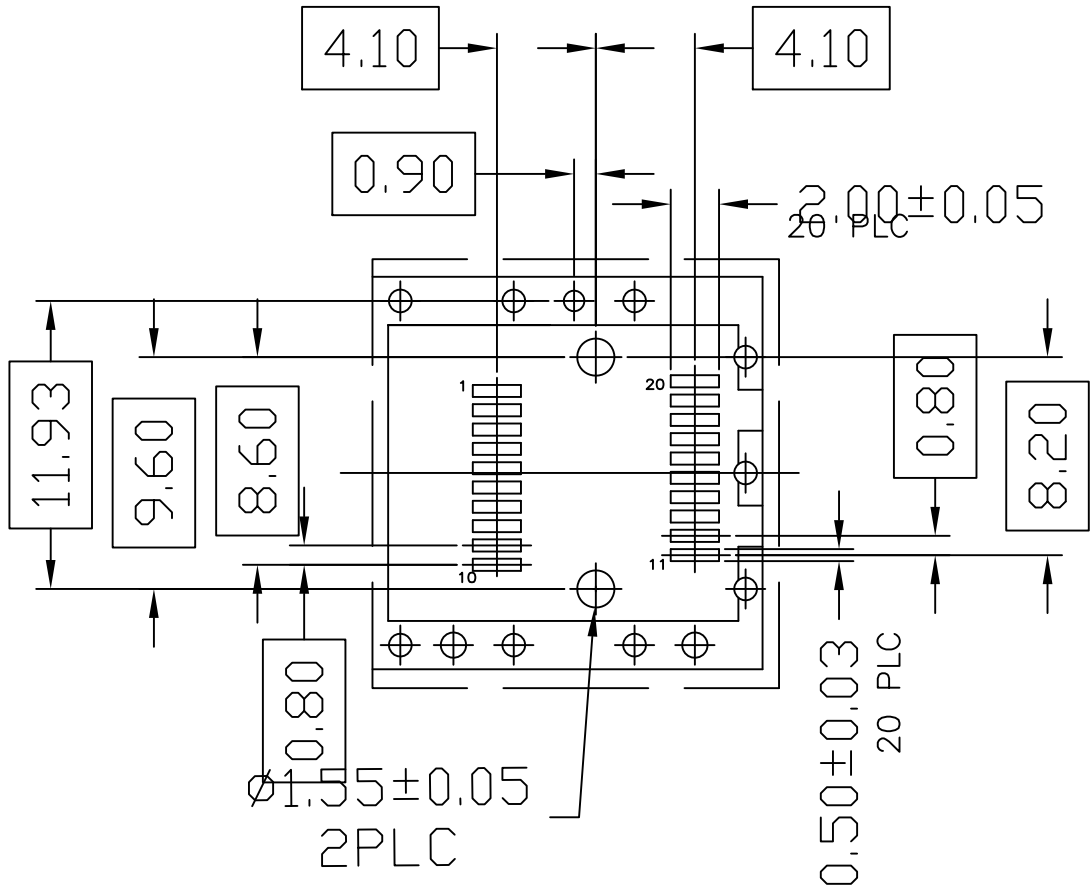


| REV. | ECN. NO. | DRAWN | DATE       | EC.content |
|------|----------|-------|------------|------------|
| A.0  | NEW      | Candy | 03/29/2022 |            |
|      |          |       |            |            |
|      |          |       |            |            |



|                         |  |                                  |
|-------------------------|--|----------------------------------|
| ⊗: QUALITY CONTROL ITEM | GENERAL TOLERANCE<br>.X ± 0.38 X: ± 2'<br>.XX ± 0.25 .X: ± 1'<br>.XXX ± 0.13 | PART NO.: SFW11-5030-064F-01     |
| APPROVED                |  | TITLE:<br>SFP&SFP+ 1X1 CONNECTOR |
| CHECKED                 |  |                                  |
| DRAWN                   | UNIT: mm   | SCALE: 1:1 SHEET: 2/3 REV.: A.0  |

1 2 3 說明: △: 備註 ◇: 版本變更 ①: 尺寸序號 ■: 重點尺寸 ▼: CPK 尺寸 DOCUMENT NO. : ZER0013/A.3

SIZE: A4

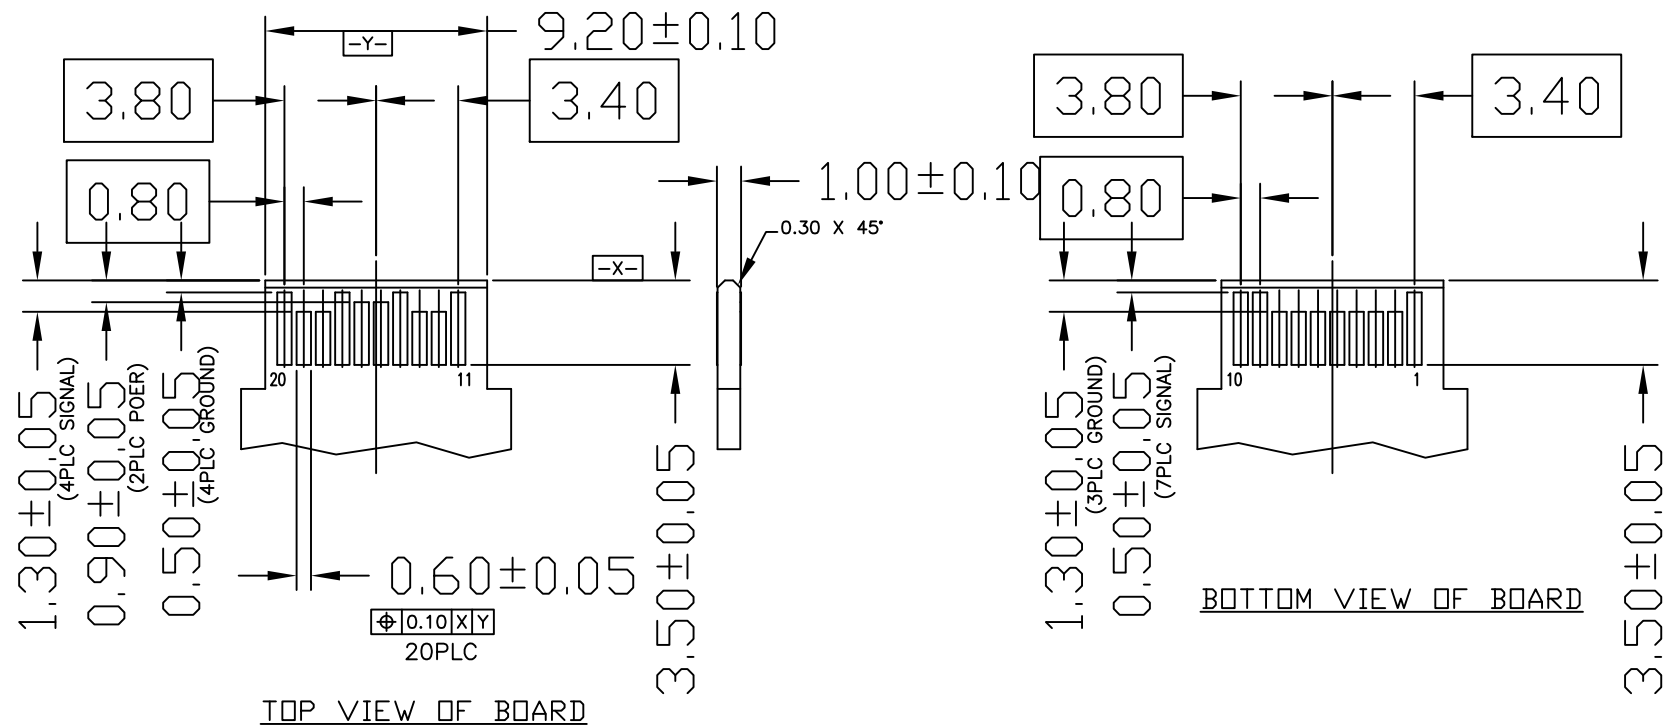

RECOMMENDED LAYOUT DETAIL MATING TRANSCEIVER PCB

| REV. | ECN. NO. | DRAWN | DATE       | EC.content |
|------|----------|-------|------------|------------|
| A.0  | NEW      | Candy | 03/29/2022 |            |
|      |          |       |            |            |
|      |          |       |            |            |



|                         |  |                                  |
|-------------------------|--|----------------------------------|
| ⊗: QUALITY CONTROL ITEM | GENERAL TOLERANCE<br>.X± 0.38 X.'± 2'<br>.XX± 0.25 .X'± 1'<br>.XXX± 0.13 | PART NO.: SFW11-5030-064F-01     |
| APPROVED                |  | TITLE:<br>SFP&SFP+ 1X1 CONNECTOR |
| CHECKED                 |  |                                  |
| DRAWN                   | UNIT: mm   | SCALE: 1:1 SHEET: 3/3 REV.: A.0  |

説明: △: 備註 ◇: 版本變更 ①: 尺寸序號 ■ 重點尺寸 ▼: CPK尺寸 DOCUMENT NO. : ZER0013/A.3

1 2 3

SIZE: A4